

NEW

Features

- SONY 1/3" Super HAD High-Resolution Color CCD
- Vari-Focal DC Auto Iris Lens Built-in 4mm~9mm
- Super Low Light Sensitivity Color 0.3 Lux, B/W 0.002 Lux
- On Screen Display Built-in / Motion Detection Built-in
- 3-Axis Rotation
- Waterproof (IP65)




CE FC

High Resolution Dome Color Camera

DCC-500DV

4~9mm Vari-focal Lens, 530 TV Lines, Day & Night

Dimensions

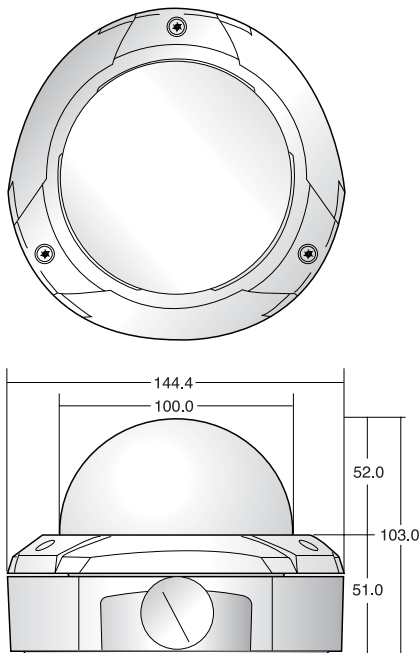

(UNIT : mm)

Technical Specifications

| MODEL | DCC-500DV(NTSC) | DCC-500DV(PAL) |
|---------------------------------|--|---------------------|
| Image Sensor | 1/3" Interline Transfer Type Sony CCD | |
| Total Pixels | 811(H)X508(V) | 795(H)X596(V) |
| Effective Pixels | 768(H)X494(V) | 752(H)X582(V) |
| Resolution | More than 530 TV lines | |
| Scanning Frequency | 15.734KHz(H), 60(V) | 15.625KHz(H), 50(V) |
| Shutter Speed | 1/60~1/100,000 sec | 1/50~1/100,000 sec |
| Min. Illumination | Color : 0.3 Lux, B/W : 0.002 Lux (Sense-up : Auto(2x~128x)) | |
| Day & Night | D&N Function by Digital Change : Auto/Off | |
| Shutte | ESL / Manual / Flickerless | |
| White Balance | ATW / AWC / MANUAL | |
| BLC | Low / Middle / High / Off | |
| AGC | Low / Middle / High / Off | |
| DNR | Auto / Off | |
| Privacy Zone & Motion Detection | 4 Programmable Zone | |
| Sharpness | On(level : 0 ~ 31) / Off | |
| Camera ID | On / Off | |
| S/N Ratio | More than 50dB | |
| Video Output | Composite video output 75 ohm terminated | |
| Lens | DC Auto Iris Lens 4 ~ 9 mm (F:1.6) | |
| Sync. System | Internal | |
| Operating Humidity | 30 % ~ 90 % RH | |
| Operating Temp. | -10 °C to 50° | |
| Dimension | φ100(Bubble) x 103(H) | |
| Weight | About 800g | |
| Power Consumption | 180mA | |
| Power Supply | DC 12 V(10.2V~14.5 V) | |